



PBH-410* PBH-420

* Shown with bag vessel stand

BAG VESSEL ASSEMBLIES

Light weight corrosion resistant polypropylene construction gives you strength without bulk

Available in 1" and 1-1/2" NPT sizes

Comes complete with gauge, wrench and 3/8" drain valve

Choice of 10" and 20" housings

Light enough to be portable

USFilter's standard bag vessel assemblies keep your system on stream longer by reducing bag filter change time.

The single large Acme thread closure ensures quick opening and positive sealing.


All PBH Series vessels come complete with gauge, wrench and 3/8" drain valve.

PBH Series bag vessel assemblies are made of lightweight corrosion resistant polypropylene to give you all the strength you need without the weight.

Bag vessel assemblies are economically priced, allowing you to install a duplex system for totally uninterrupted flow rates.

Bags are available in polypropylene felt, absolute-rated high-efficiency polypropylene and nylon monofilament mesh—ideal for filtering and straining applications from 1 to 800 microns.

BAG VESSEL Assemblies

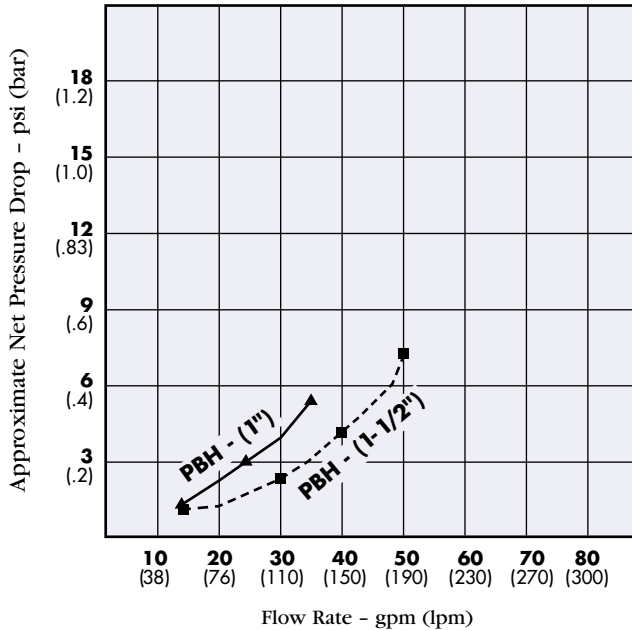

Housing Specifications and Performance Data

Model (Inlet/Outlet)	Maximum Dimensions	Initial ΔP (psi) @ Flow Rate (gpm)	Maximum Pressure
PBH-410 (1")	13-1/8" x 7-1/4" (333 mm x 184 mm)	1 psi @ 15 gpm (0.1 bar @ 57 lpm)	100 psi (6.9 bar)
PBH-410 (1 1/2")	13-5/8" x 7-1/4" (346 mm x 184 mm)	1 psi @ 20 gpm (0.1 bar @ 76 lpm)	100 psi (6.9 bar)
PBH-420 (1")	23-3/8" x 7-1/4" (594 mm x 184 mm)	1 psi @ 15 gpm (0.1 bar @ 57 lpm)	90 psi (6.2 bar)
PBH-420 (1-1/2")	23-7/8" x 7-1/4" (606 mm x 184 mm)	1 psi @ 20 gpm (0.1 bar @ 76 lpm)	90 psi (6.2 bar)

- PBH-410 accepts a standard 4" x 8-1/4" (102 mm x 210 mm) bag. Dimensions allow for 1" (25mm) overlap on basket.
- PBH-420 accepts a standard 4" x 18-1/2" (102 mm x 470 mm) bag. Dimensions allow for 1" (25mm) overlap on basket.

Materials of Construction

- | | | | |
|---------------------|----------------------------|------------------------------|------------------|
| • Housing | Polypropylene | • Ball Valve | PVC/Buna-N Seals |
| • Cap | Polypropylene | • Basket | Polypropylene |
| • Gauge | Bismuth Brass (lead free) | • O-Ring and Gaskets | Buna-N |
| • Vent Plug | Polypropylene | • Maximum Temperature | 100° F (37.8° C) |
| • Drain Plug | High Density Polypropylene | | |

NOTE: Many standard bags with rings may be used in these vessels. Refer to USFilter's bag filter specifications sheet for 1 to 200 micron quick-install bags. Bag Vessel Stand sold separately.

USFilter
Plymouth Products

502 Indiana Avenue • Sheboygan, WI 53081
USA/Canada: 800-645-0267 phone • 888-203-7361 fax
International: 920-451-9322 phone • 920-457-2417 fax

VIVENDI
water company

www.plymouthwater.com
Printed in U.S.A. 07/01 310055 Rev A